

Airmat Pro H2O Power

Product Range



Features




Applications



Filter Class

G

Coarse

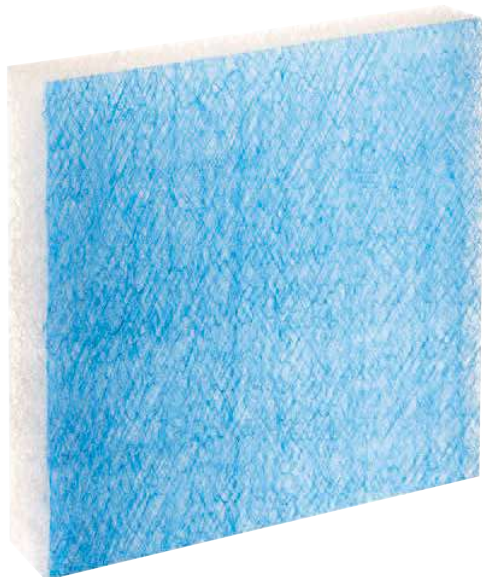

KEY FACTS

- Combined air filter and water coalescer
- Ideally suited to coastal applications
- High dust holding capacity of 5340 g/m² (SAE)

DESIGN

Disposable media of continuous glass fibers with progressive density coated with adhesive. The downstream side of the media is colored blue to ensure correct installation.

APPLICATIONS

For use in industrial applications with rotating machinery like engines, gas turbines and smooth-flow compressors. Suitable for both land-based and offshore applications.

Airmat Pro

H2O Power

PERFORMANCE DATA

Article No.		Filter Class	Dimensions	Flow Rate	Pressure Drop
	ISO 16890	EN 779	mm	m ³ /h	Pa
800163024418	Coarse 60%	G4	610 x 610 x 125	3400	105

SPECIFICATION

Recommended air velocity	2.5 m/s	Recommended final pressure drop	250 Pa
Heat resistance	80 °C	Moisture resistance	100 % rel. humidity
Regenerable	No	Incinerable	Yes

Products listed above do not include a holding frame.
See our Airhandling range for more information on suitable pad-holding frames.